

HTML



H5S POSTMAN

Copyright © 2018 linkingvison, All rights reserved

RESTFUL API

SYSTEM

Login

Logout

Keepalive

SOURCE
MANAGEMENT

GetSrc

GetImage

AddSrcFile

AddSrcRTSP

AddSrcONVIF

DelSrc

Ptz

ONVIF

OnvifSearch

OnvifProbe


RECORD

Record

Snapshot

Search

← → ↻

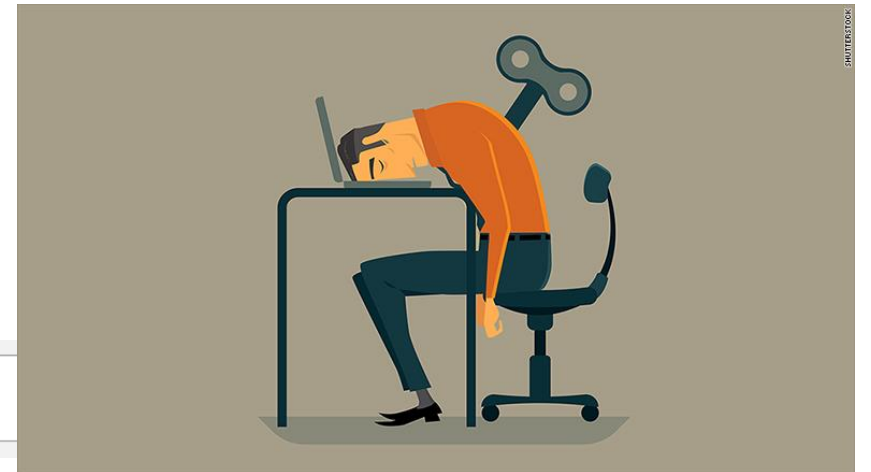

You want input one by one?

IMPORT FROM PREDEFINED

The screenshot shows the Postman application interface. The top bar includes the Postman logo, menu items (File, Edit, View, Help), and workspace information (My Workspace). The left sidebar displays a collection named 'h5stream api' with 26 requests, including 'keepalive', 'system', and 'login'. The main workspace shows a 'Login' request with a GET method and a URL containing a placeholder for the host. The 'Authorization' tab is selected, showing 'No Auth'. The 'Body' tab is also visible, displaying a JSON response with fields for 'bStatus', 'strSession', and 'nTimeout'. The status bar at the bottom indicates a successful response (200 OK) with a time of 75 ms and a size of 165 B.

Postman

File Edit View Help

New Import Runner

My Workspace

IN SYNC

Filter

History Collections

h5stream api
26 requests

keepalive
GET Keepalive

system
GET Login

GET Logout

GET GetSystemInfo

GET GetRunInfo

srcmgr

loading

GET DelSrc

GET AddSrcONVIF

GET GetSrc

GET GetSrc 2

GET GetImage

GET AddSrcFile

GET AddSrcRTSP

GET AddSrcONVIF

GET AddSrcONVIF 2

GET Dtz

Keepalive Login OnvifProbe Record OnvifSearch

H5STREAM ENV HTTP

Examples (0)

GET `{{H5_HOST}}/api/v1/Login?user=admin&password=827ccb0eea8a706c4c34a16891f84e7b` Params Send Save

Authorization Headers Body Pre-request Script Tests

TYPE

No Auth

This request does not use any authorization. [Learn more about authorization](#)

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

Body Cookies Headers (2) Test Results


Status: 200 OK Time: 75 ms Size: 165 B

Pretty Raw Preview JSON Save Response

```
1 {  
2   "bStatus": true,  
3   "strSession": "c1782caf-b670-42d8-ba90-2244d0b0ee83",  
4   "nTimeout": 600  
5 }
```


IMPORT API

h5stream api.postman_collection.json

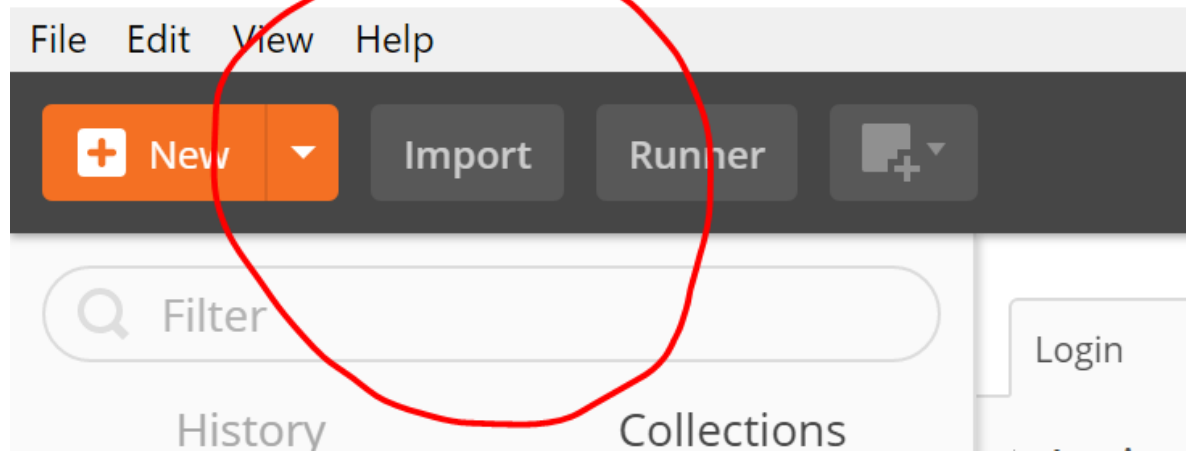

IMPORT ENVIRONMENT

H5STREAM ENV HTTP.postman_environment.json

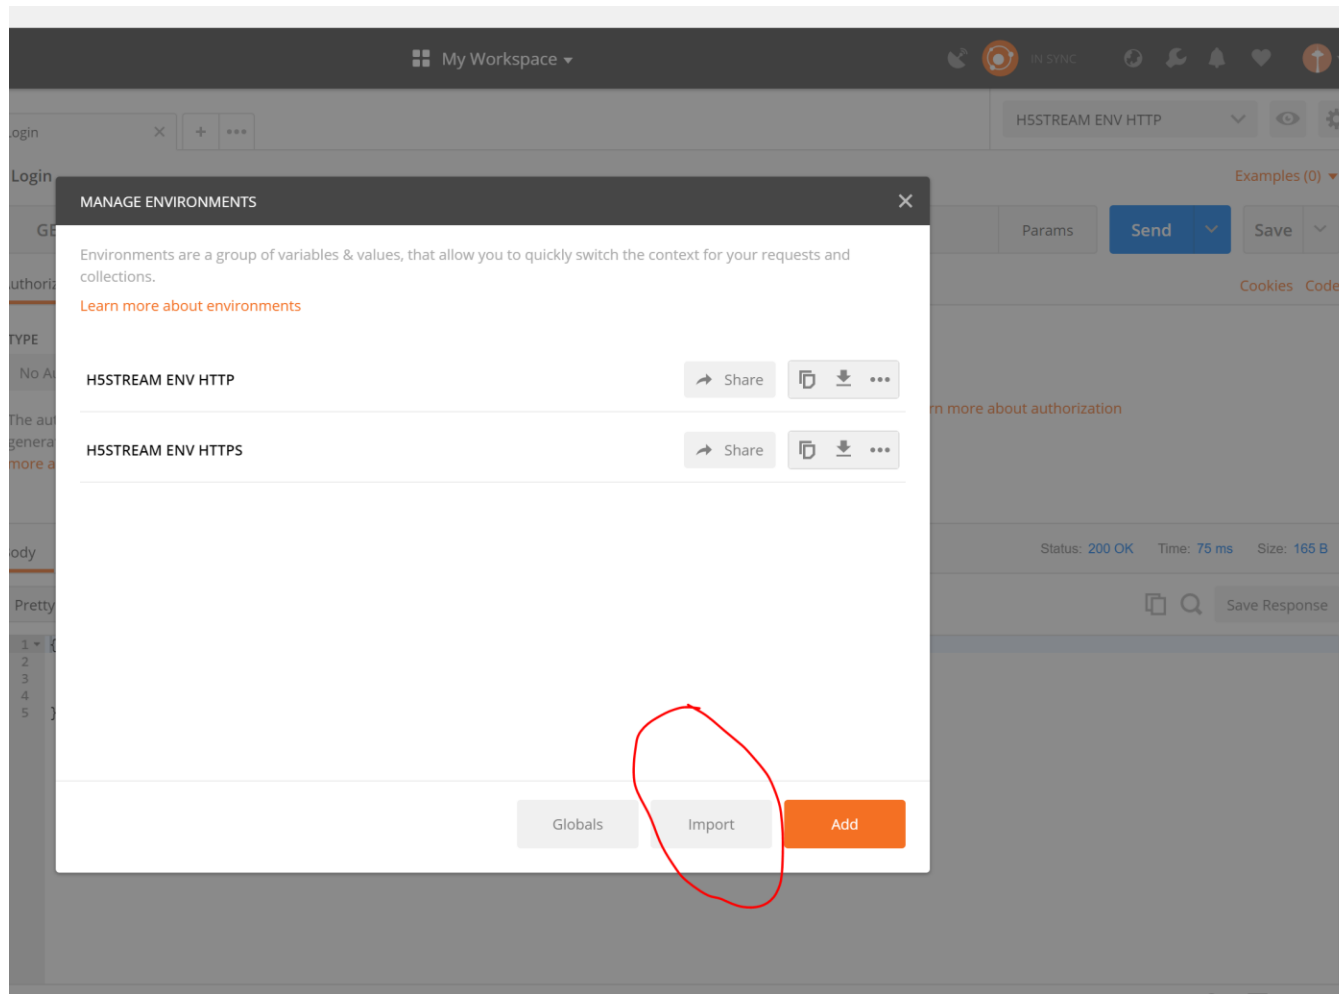

CHANGE HOST PORT

IN SYNC

H5STREAM ENV HTTP

H5STREAM ENV HTTP [Edit](#)

H5_HOST	http://192.168.100.162:8080
h5_session	c1782caf-b670-42d8-ba90-2244d0b0ee83

Globals [Edit](#)

No global variables

Save common values across all your environments as global variables. [Learn more about globals](#)

Status: 200 OK Time: 75 ms Size: 165 B

